


eBMS LTIO - 6UI 6UO



EO05666

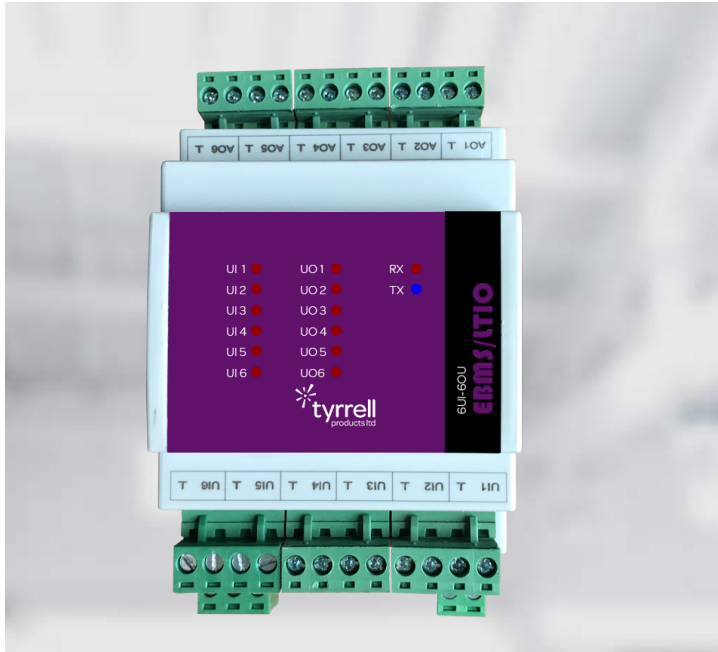

Features / Benefits / About

- Expansion Module for Building Automation Systems
- 6 Universal Inputs
- 6 Universal Outputs (AO Can Drive SRMV)
- User Friendly Configuration
- Status LEDs for all Inputs, Outputs and Communication
- RS-485 Connection as Modbus RTU Slave
- Slave ID and Baud-rate Configured with DIP Switches
- Counter Value Stored in Permanent Memory.
- Last Value Held in Memory During Power Failure.

Specification

Nominal Voltage	24V AC/DC (+10%...-15%)	RS - 485 Connection	Modbus RTU Slave
Universal Input Configurations	0 (2)- 10V DC 0 (4) - 20mA (500 Ohm Resistor Required) PT1000 NTC10K3A1 NTC10K4A1 NTC 1K8 Voltage Free Contact Pulse Input (Max. 20Hz, 50% Duty Cycle, Max. 50 Ohm Contact)	Ambiant Temperature Range	0...50°C (32...122°F)
		Non-Operating Range	-25...+75°C (-13...+167°F)
		Humidity Range	5...95%RH, Non-condensing
		Dimensions	70 (w) x 117 (l) x 59 (d) mm
		Mounting	For 35mm DIN Rail Mounting
		Degree of Protection	IP20
		Connections	Plug-in Terminals 1 x 2.5mm ²
Universal Outputs	0 (2) - 10V DC (20mA Max.) 0/10V DC (To Drive a Single Relay Module -SRMV)		